

(KABELSCHLEPP)

Innovative solutions

for the office funitive industry



CABLE CARRIER MADE OF PLASTIC
EASY CABLE INSTALLATION
VERY LONG SERVICE LIFE
FOR OFFICE FURNITURE AND INTERIORS

Innovative solutions







TSUBAKI KABELSCHLEPP

PROTUM OFFICE - P 0240 GS



Outer height 23 mm



Inner height 10 mm



Outer width 54 mm



Inner width 50 mm kabelschlepp.de/ protumoffice

Based on the PROTUM cable carrier system this variant has been adapted to the requirements of the office environment.

Offering an inner width of 50 mm and the possibility of double allocation PROTUM OFFICE provides sufficient space for tele-communication-, power and data cables as they are used in modern offices.

This link-free design integrates itself, for example with elegant looking silver-grey side bands, harmoniously in the office environment.



Small, lightweight cable carrier

- Long service life no joints and thus no joint wear
- Good ratio of required space to outer dimension
- Simple cable inserting by pressing in
- Easy to mount and to fill
- For subsequent installation
- Clean and space-saving installation
- Single- and double-sided laying possible

Simple, quick installation

- Connectors for all flat surfaces
- Standard connector
- Up to 4 types of installation possible (magnets, screws, cable ties and tape)
- Floor connector for stable and clean ending to the floor





Combination options for end connectors

Different combination options for the connectors are necessary depending on the model of your office furniture. They can be fixed underneath table tops/cable ducts, on rectangular or round table legs, or on the floor.

Connector A:Angled for tabletop



Table connector for mounting the cable carrier with screws either under the tabletop or onto the cable channel.

Connector B: Oval for tabletop



Table connector for mounting the cable carrier with screws either under the tabletop or at the cable trough.

Connector C/E: For table frame flat



Rectangular connector for mounting the cable carrier at the table frame. Mounting with integrated magnets.¹

Connector D/F:For table frame round



Connector for mounting the cable carrier at the table frame $\emptyset = 70$ mm. Mounting with integrated magnets.²

Connector G:

Floor connector




Floor connector for a clean ending of the cable carrier to the floor covering.

- Version connection E available as connection C without magnets for fixing with screws or cable ties.
- ² Version connection F available as connection D without magnets for fixing with screws or cable ties.

Innovative solutions





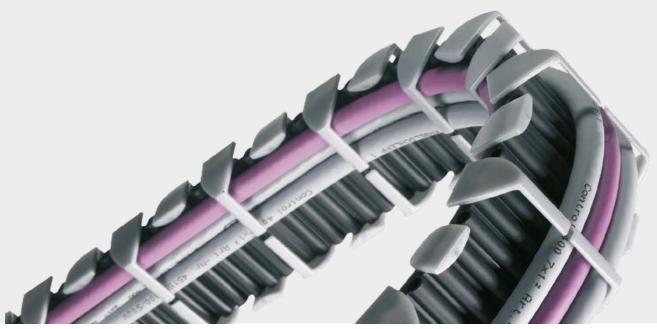

Color combinations

All connections can be combined with each other and are available in the color variants silver-gray, black and white.















Order | PROTUM OFFICE - P 0240 GS

Standard sets for height-adjustable desks (standing/seated work stations)	Color	Order.no. SU
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections F for mounting underneath the table top and on round frames $(d = 70 \text{ mm})$	black/ silver-gray	75908
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections F for mounting underneath the table top and on round frames $(d = 70 \text{ mm})$	white	75907
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections F for mounting underneath the table top and on round frames $(d = 70 \text{ mm})$	silver-gray	75906
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections F for mounting underneath the table top and on round frames ($d = 70 \text{ mm}$)	black	75905
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections E for mounting underneath the table top and on flat frames ($d = 70 \text{ mm}$)	black/ silver-gray	75904
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections E for mounting underneath the table top and on flat frames ($d = 70 \text{ mm}$)	white	75903
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections E for mounting underneath the table top and on flat frames ($d = 70 \text{ mm}$)	silver-gray	75902
Standard set Protum Office standing/seated work station, overall length 1347 mm incl. 1 connection B and 2 connections E for mounting underneath the table top and on flat frames ($d = 70 \text{ mm}$)	black	75901



Standard sets for non-height adjustable desks (standard work stations)

Standard sets for non-height adjustable desks (standard work stations)	Color	Order.no. SU
Standard set Protum Office standard work station, overall length 823 mm incl. 1 connection B and 1 connection G for mounting underneath the table top and closure to the floor	black/ silver-gray	75900
Standard set Protum Office standard work station, overall length 823 mm incl. 1 connection B and 1 connection G for mounting underneath the table top and closure to the floor	white	75898
Standard set Protum Office standard work station, overall length 823 mm incl. 1 connection B and 1 connection G for mounting underneath the table top and closure to the floor	silver-gray	75897
Standard set Protum Office standard work station, overall length 823 mm incl. 1 connection B and 1 connection G for mounting underneath the table top and closure to the floor	black	75896





(KABELSCHLEPP)

CABLE CARRIER SYSTEMS

Cable carriers made of steel and plastic QUANTUM cable and hose carrier system PROTUM cable and hose carrier system ROBOTRAX cable and hose carrier system

TRAXLINE Cables for Motion

Continuous bending hi-flex cables for cable carriers
TOTALTRAX complete turn-key carrier systems
Pre-assembled cables

GUIDEWAY PROTECTION SYSTEMS

Telescopic covers Link apron covers Way wipers Conical spring covers Bellows Protective devices

CONVEYOR SYSTEMS

Hinged belt conveyors Scraper conveyors Belt conveyors

TSUBAKI KABELSCHLEPP GmbH

Daimlerstraße 2 D-57482 Wenden-Gerlingen Fon: +49 (0)2762 4003-0 Fax: +49 (0)2762 4003-220 E-mail: info@kabelschlepp.de kabelschlepp.de

TSUBAKI KABELSCHLEPP worldwide

For contacts, adresses and much more, visit our web site at **kabelschlepp.de**