


Floating Moving Device

Optimum transfer of cables

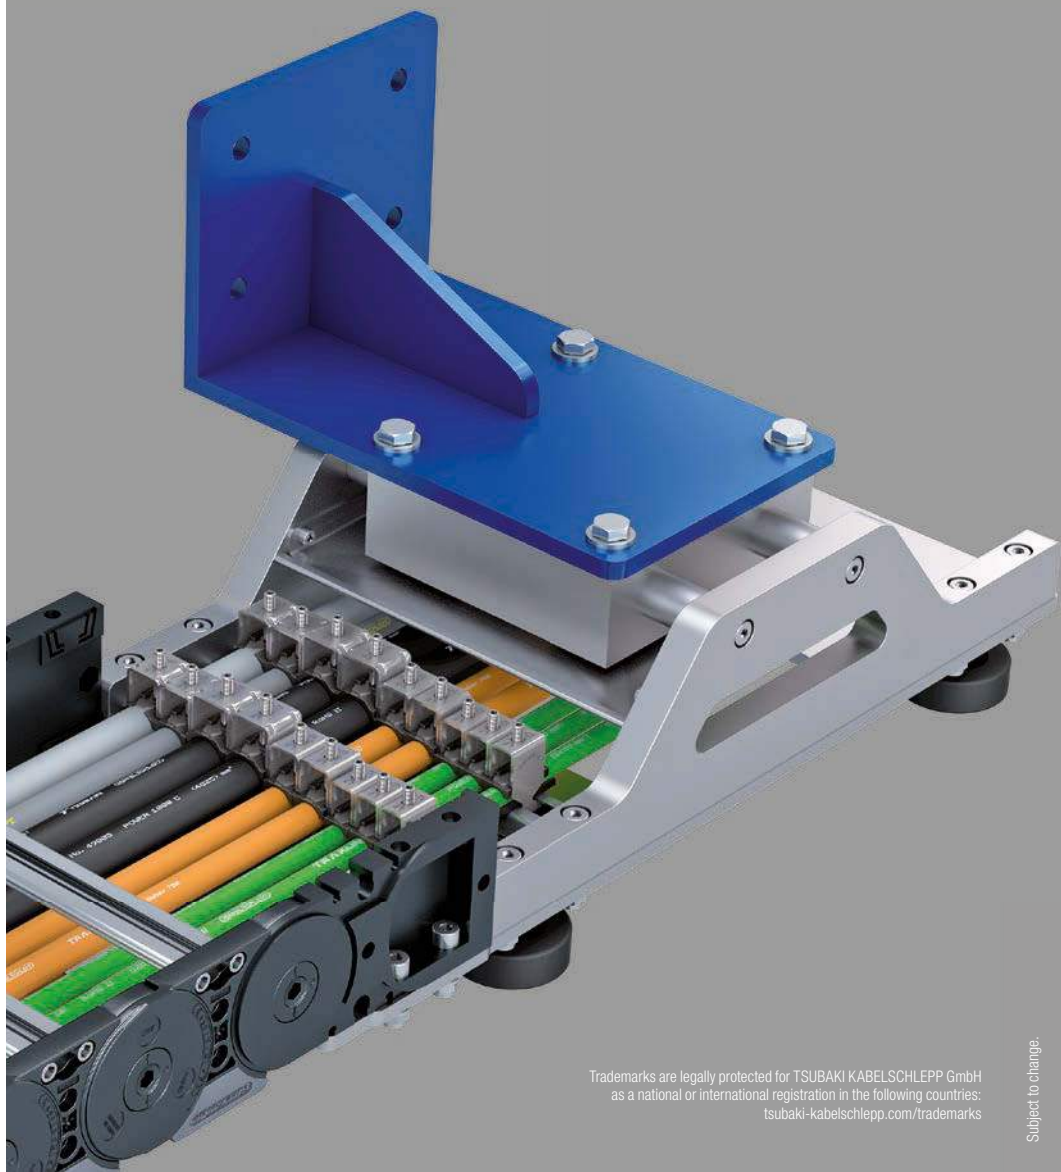

Trademarks are legally protected for TSUBAKI KABELSCHLEPP GmbH
as a national or international registration in the following countries:
[tsubaki-kabelschlepp.com/trademarks](https://www.tsubaki-kabelschlepp.com/trademarks)

Subject to change.

Floating Moving Device (TKFMD) – To compensate for lateral offset in cable carriers

A flexible driver connection is required to ensure guiding of the cable carrier without transverse forces in applications with increased lateral offset.

The connection has to ensure a relative movement between the connection of the cable carrier system and the system driver.

Features

- **Tolerance compensation:**
 - Horizontal: min. +/- 30 mm,
 - vertical: min. +/- 20 mm
 - Inaccuracies in channel alignment/ manufacturing/assembly are compensated
- **Continued cable routing**
No threading or passing through of the tail lengths required
- **Wear**
 - Wear reduced to a minimum
 - Roller-guided system in connection with all TSUBAKI KABELSCHLEPP guide channels
- **Material**
Stainless steel/aluminum, or painted to customer specifications
- **Easy installation**
The cable carrier system has two defined mounting assemblies for easy installation of cables and hoses
- **Cable routing**
The protected continued cable routing in the Floating Moving Device corresponds to the inner height of the cable carrier
- **Strain relief**
Easy access and assembly with LineFix clamps for strain relief
- **Standard connection dimensions**
 - For horizontal and vertical connection including GO module (friction-optimized for low wear)

Relevant factors

- Guiding without transverse forces:
 - protects the cable carrier
 - minimizes costs through reduced downtimes
 - reduces defects/malfunctions/damage
- The compensation of the parallel error between the system and the cable carrier is ensured
- Easy maintenance/disassembly, if necessary
- Easy retrofitting on an opposite-arrangement system
- Easy connection options
- System reliability and availability


Suitable for:

Type	Inner width B _i [mm]
M0950	130 – 500
M1250	150 – 800
M1300	140 – 500*
TKHD90	140 – 500*

* Additional inner widths on request.

Arrangements

Single-sided arrangement:



Opposite arrangement:

