


UAT series


Extreme cable protection in harsh environmental conditions

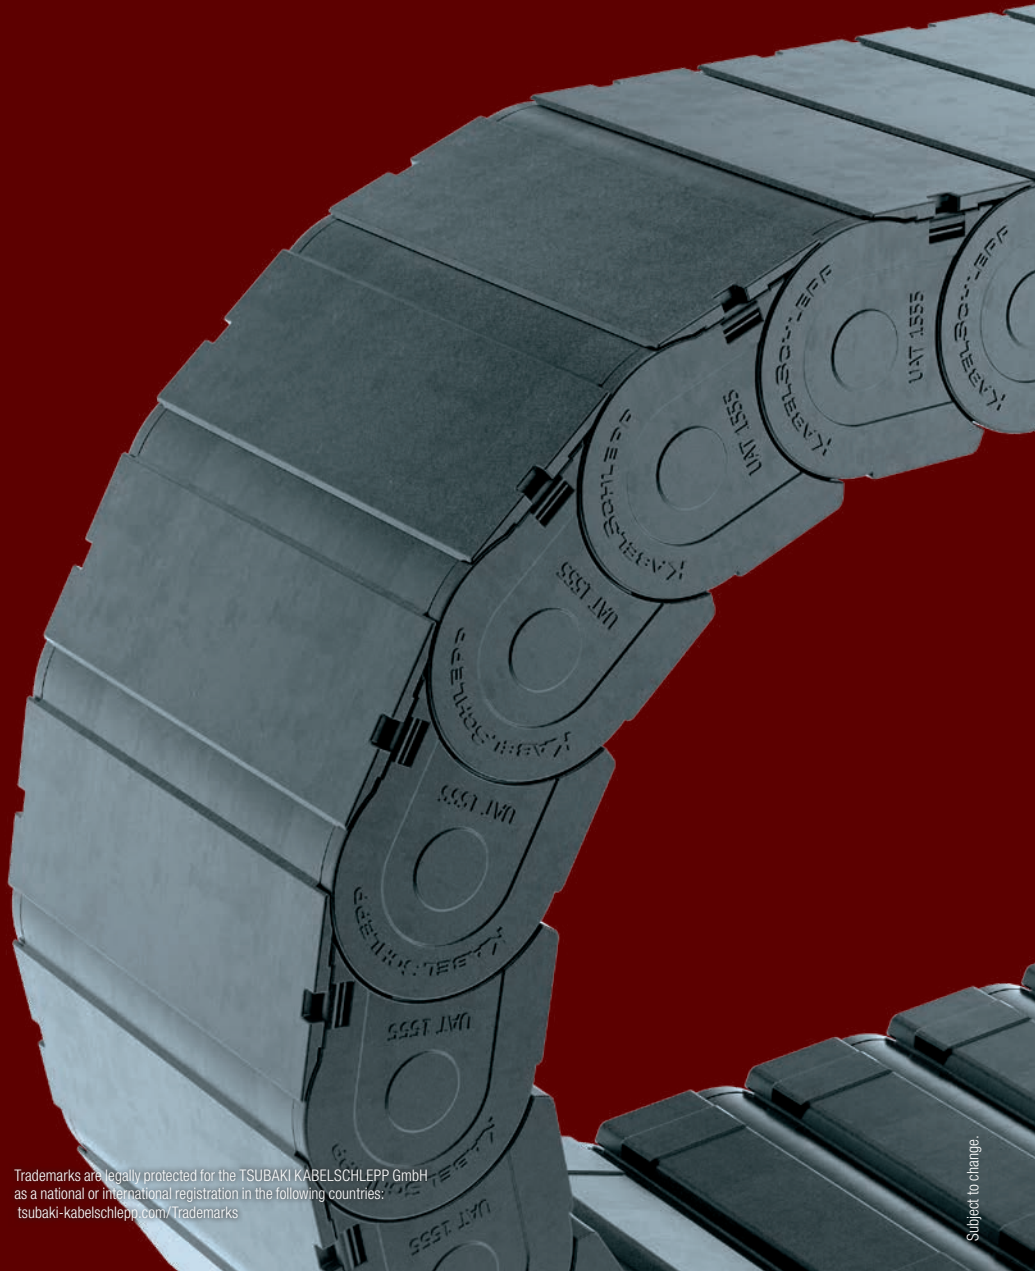

Trademarks are legally protected for the TSUBAKI KABELSCHLEPP GmbH as a national or international registration in the following countries:
tsubaki-kabelschlepp.com/Trademarks

Subject to change.


UAT series | Overview

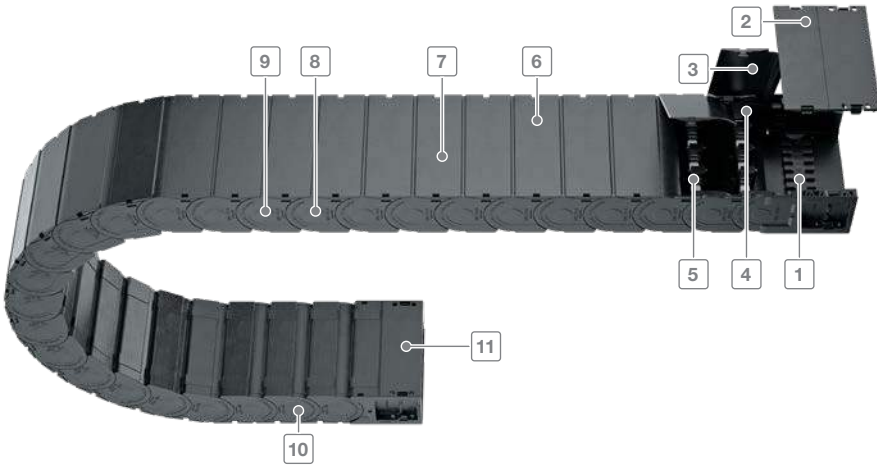

- 1 Connectors with optional strain relief
- 2 Completely detachable covers
- 3 Easy and quick to open
- 4 Gentle on the cables – interior space without projecting edges
- 5 Dividers and height separations for cable separation
- 6 Designs with outward opening covers
- 7 Secure hold of the covers also under heavy load (e.g. by the use of hydraulic cables)
- 8 Chain links made of plastic
- 9 Extensive unsupported length
- 10 Very quiet thanks to integrated noise damping system
- 11 Cover system also in the connection

Features

- outstanding protection for the cables
- quick cable laying – outside opening designs
- very quiet thanks to internal noise damping system
- large unsupported length
- high-quality visual design
- for unsupported and gliding arrangements
- Sliding surfaces with wear volume integrated in the inner cover

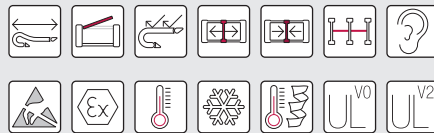

Simply unlock cover with a screwdriver



Detach the cover from the chain link



Divider system TS1



Optional strain relief comb – also placed on top of one another
















UAT series | Overview

Key for abbreviations
on page 16

Design guidelines
from page 64

Technical support:
technik@kabelschlepp.de

 **online-engineer.de**
Cable Carrier Configurator

Type	Opening variant	Stay variant	h_i [mm]	h_G [mm]	B_i [mm]	B_k [mm]	B_i - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d _{max} [mm]
											
											
											
											
											
											
UAT1555											
		080	50	69	75–175	$B_i + 21$	–	55.5	100–300	15	40

UAT series | Overview

Unsupported arrangement			Gliding arrangement			Inner distribution				Installation variants			Page
Travel length \leq [m]	v_{max} [m/s]	a_{max} [m/s ²]	Travel length \leq [m]	v_{max} [m/s]	a_{max} [m/s ²]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	
										vertical hanging or standing	lying on the side	rotating arrangement	558
6.5	8	40	150	3	15	•	•	-	-	•	•	-	

Inner heights



Inner widths



UAT1555



Pitch
55.5 mm



Inner height
50 mm



Inner widths
75 – 175 mm



Bending radii
100 – 300 mm

Key for abbreviations
on page 16

Stay variants



Design 080..... page 560


Covered on both sides with outside detachable cover

- Plastic cover for rough environmental conditions with dirt, chips and dust.
- Fully detachable on one side in any position.
- **Inside:** very quick release.

Design guidelines
from page 64

Technical support:
technik@kabelschlepp.de

Unsupported arrangement

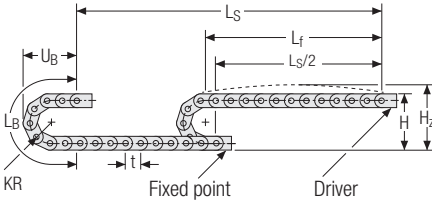

KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
100	268	298	425	190
125	318	348	504	215
150	368	398	582	240
175	418	448	661	265
200	468	498	739	290
225	518	548	818	315
250	568	598	896	340
300	668	698	1053	390

Inner heights




Inner widths



Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 2.9 \text{ kg/m}$ at $B_i 125 \text{ mm}$. For other inner widths, the maximum additional load changes.

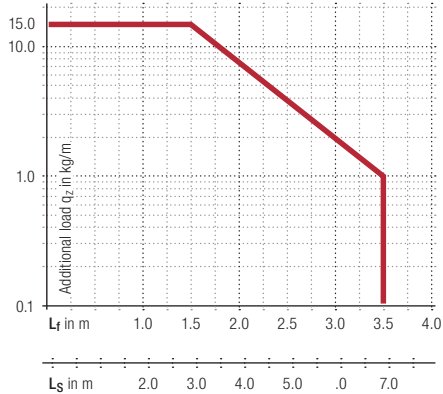


Speed
up to 8 m/s

Acceleration
up to 40 m/s²

Travel length
up to 6.5 m

Additional load
up to 15 kg/m

Gliding arrangement

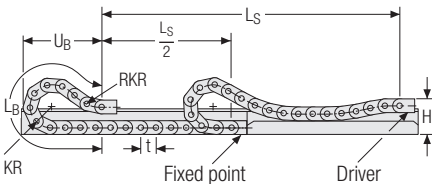

Speed
up to 3 m/s

Acceleration
up to 15 m/s²

Travel length
up to 150 m

Additional load
up to 15 kg/m

The gliding cable carrier has to be routed in a channel. See p. 782.

UAT1555.080 | Dimensions · Technical data

Stay variant 080 – covered on both sides with inside detachable cover



- Plastic cover for rough environmental conditions with dirt and chips.
- Fully detachable on one side in any position.
- **Inside:** very quick release.



Key for abbreviations on page 16

Design guidelines from page 64

Technical support: technik@kabelschlepp.de

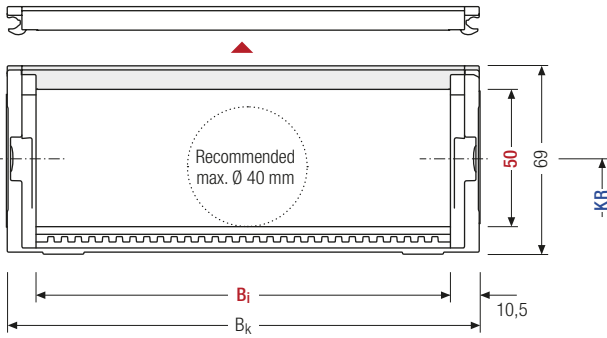

i The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_s}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_G [mm]	B_i [mm]			B_k [mm]	KR [mm]				q_k [kg/m]
50	69	75	125	175	$B_i + 21$	100	125	150	175	2.43
						200	225	250	300	3.44

Order example

UAT1555
Type
·
080
Stay variant
·
175
Bi [mm]
·
225
KR [mm]
·
2553
L_k [mm]
-
VS
Stay arrangement

Divider systems

As a standard, the divider system is mounted on every 2nd chain link.

As a standard, dividers or the complete divider system (dividers with height separation) are movable in the cross section (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.

The locking cams click into place in the locking grids in the covers (**version B**).

Inner heights




Inner widths




Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x Raster [mm]	n _T min
A	5	10	7	—	—
B	7.5	10	7	5	—

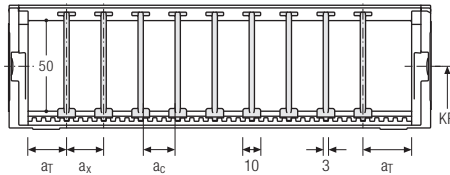

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x Raster [mm]	n _T min
A	5	10	7	—	2
B	7.5	10	7	5	2

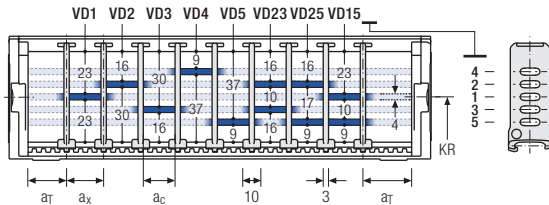

tsubaki-kabelschlepp.com/uat

Order example

TS1

A

3

VD0

-

VD1

VD1

Divider system

Version

n_T

Height separation

Please state the designation of the divider system (**TS0, TS1 ...**), version and number of dividers per cross section [n_T].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.




UAT1555 | End connectors | UMB



Universal end connectors UMB – plastic (standard)

The universal end connectors (UMB) are made from plastic and can be mounted from the top, from the bottom, or face on.

Driver



Fixed point

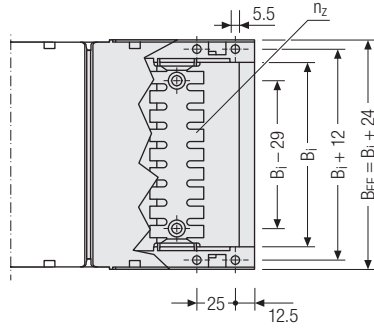

Inner heights



Inner widths




▲ Assembly options

B_i [mm]	B_{EF} [mm]	n_z
75	99	2 x 5
125	149	2 x 9
175	199	2 x 13



Recommended tightening torque: 5 Nm for cheese-head screws ISO 4762 - M5 x 8.8



Connection point

F – fixed point
M – driver

Connection type

U – universal end connector

Order example



UMB	.	F	U
UMB	.	M	U
End connector		Connection point	Connection type