



TKA series

Chip-tight right to the end



* Refers to type TKA55 with Bi 50 - 175.
More information on certification can be found at:
tsubaki-kabelschlepp.com/tka-ip54


Trademarks are legally protected for the TSUBAKI KABELSCHLEPP GmbH
as a national or international registration in the following countries:
tsubaki-kabelschlepp.com/trademarks

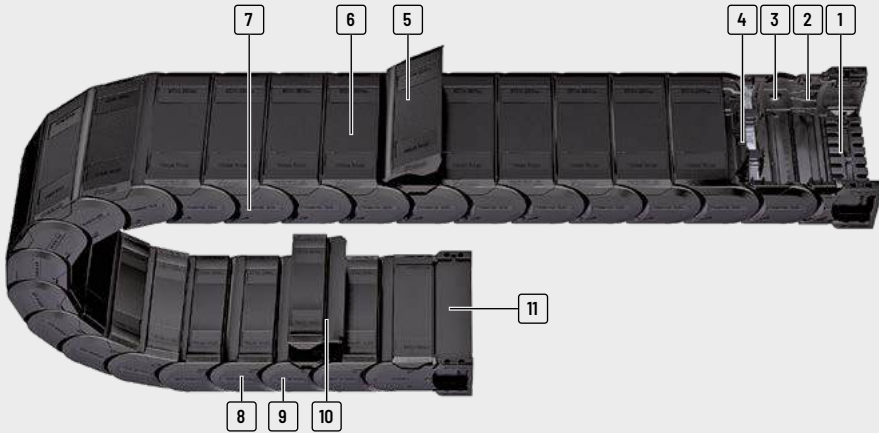

- | | | | |
|--|---|--|---|
| <p>1 End connectors with optional strain relief</p> <p>2 Interior gentle on the cables without projecting edges</p> <p>3 Integrated noise damping</p> | <p>4 Dividers and height separations for separating the cables</p> <p>5 Quick and easy opening from any position</p> <p>6 Secure cover attachment even under severe stresses (e.g. from hydraulic lines)</p> | <p>7 Chain links made of glass-fiber reinforced plastic</p> <p>8 Bolt/hole connection and stroke system covered completely</p> <p>9 Designs with inward or outward opening cross-bars</p> | <p>10 Covers completely detachable on one side</p> <p>11 Cover sheet for universal end connectors</p> |
|--|---|--|---|

Features

- | | |
|---|---|
| <ul style="list-style-type: none"> » Excellent cable protection in the connector area » Chip and dirt resistant due to smooth surfaces » Extensive unsupported length » High torsional rigidity » Low noise emission » Easy-to-open cover with simultaneously high retention force on the chain link during operation | <ul style="list-style-type: none"> » Measurement scale for easy alignment of the dividers » TKA55: IP54 tested and certified* |
|---|---|



Optimized utilization of the interior space; vertical and horizontal inner distribution possible



Easy-open covers from any position offer secure fastening



Triple-stroke system for extensive unsupported length



Universal end connector with option for integrating strain relief elements

Type	Opening variant	Stay variant	h_i [mm]	h_G [mm]	B_i [mm]	B_k [mm]	B_i - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d _{max} [mm]
TKA30											
		060	20.5	28.5	15 - 65	28 - 78	-	30.5	55 - 180	3	16
		080	20.5	28.5	15 - 65	28 - 78	-	30.5	55 - 180	3	16
TKA38											
		060	26	36	25 - 130	41 - 146	-	38.5	70 - 230	5	20
		080	26	36	25 - 130	41 - 146	-	38.5	70 - 230	5	20
TKA45											
		060	36	50	50 - 150	66 - 166	-	45.5	82 - 230	6	28.5
		080	36	50	50 - 150	66 - 166	-	45.5	82 - 230	6	28.5
TKA55											
		060	45	64	50 - 250	70 - 270	-	55.5	100 - 300	15	36
		080	45	64	50 - 250	70 - 270	-	55.5	100 - 300	15	36

Unsupported arrangement			Gliding arrangement			Inner Distribution				Movement			Page
Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s ²]	Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s ²]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	
													
3.5	10	50	80	2.5	25	•	•	-	-	•	•	-	592
3.5	10	50	80	2.5	25	•	•	-	-	•	•	-	593
3.9	10	50	120	2.5	20	•	•	-	-	•	•	-	598
3.9	10	50	120	2.5	20	•	•	-	-	•	•	-	599
4.7	9	45	125	3	20	•	•	-	•	•	•	-	604
4.7	9	45	125	3	20	•	•	-	•	•	•	-	605
6.5	8	40	150	3	15	•	•	-	•	•	•	-	612
6.5	8	40	150	3	15	•	•	-	•	•	•	-	613

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

TKA30



Pitch
30.5 mm



Inner height
20.5 mm



Inner widths
15 – 65 mm



Bending radii
55 – 180 mm

Stay variants



Design 060 page 592

Covered on both sides with inside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.




Design 080 page 593

Covered on both sides with outside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.

Unsupported arrangement

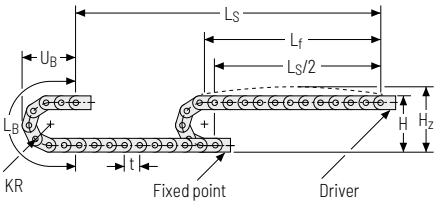


KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
55	139	164	234	100
75	179	204	297	120
95	219	244	359	140
125	279	304	454	170
145	319	344	516	190
180	389	414	626	225

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 0.67 \text{ kg/m}$ at $B_i 50 \text{ mm}$. For other inner widths, the maximum additional load changes.

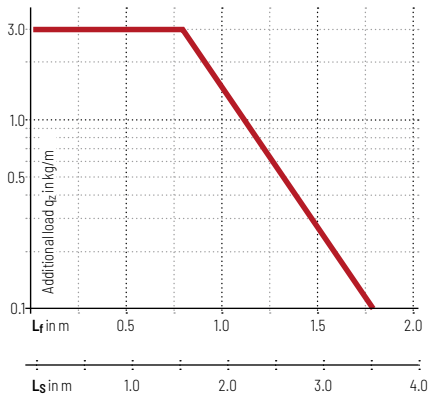

Speed
up to 10 m/s



Acceleration
up to 50 m/s²




Travel length
up to 3.5 m



Additional load
up to 3 kg/m

Gliding arrangement

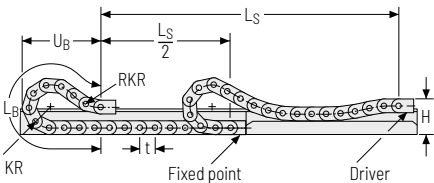

Speed
up to 2.5 m/s



Acceleration
up to 25 m/s²



Travel length
up to 80 m



Additional load
up to 3 kg/m



The gliding cable carrier has to be routed in a channel. See p. 866.

PROTUM® series
K series
UNIFLEX Advanced series
M series
TKHP® series
XL series
QUANTUM® series
TKR series
TKA series
UAT series

Stay variant 060 – covered on both sides with inside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 15 – 65 mm

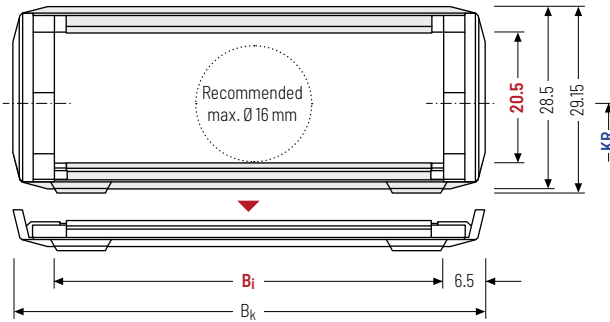

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_G [mm]	h_G' [mm]	B_i [mm]			B_k [mm]	KR [mm]			q_k [kg/m]
20.5	28.5	29.15	15	20	25	$B_i + 13$	55	75	95	0.48 – 0.76
			38	50	65		125	145	180	

Order example



TKA30

Type

060

Stay variant

50

B_i [mm]

125

KR [mm]

915

L_k [mm]

VS

Stay arrangement

Stay variant 080 – covered on both sides with outside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 15 – 65 mm

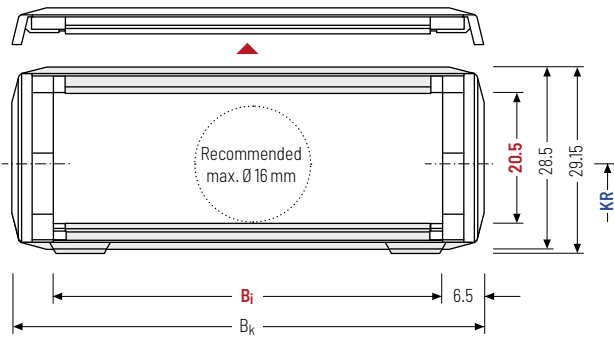

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h _i [mm]	h _g [mm]	h _{g'} [mm]	B _i [mm]			B _k [mm]	KR [mm]			q _k [kg/m]
20.5	28.5	29.15	15	20	25	B _i + 13	55	75	95	0.48 – 0.76
			38	50	65		125	145	180	

Order example



TKA30 . 080 . 50 . 125 . 915 . VS
Type Stay variant B_i [mm] KR [mm] L_k [mm] Stay arrangement

PROTUM® series
K series
UNIFLEX Advanced series
M series
TKHP® series
XL series
QUANTUM® series
TKR series
TKA series
UAT series

Divider systems

As a standard, the divider system is mounted on every 2nd chain link.

As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).


The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.

The locking cams click into place in the locking grids in the covers (**version B**).

Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	3.5	7	5	-	-
B	3.5	8	6	2	-


B _f [mm]	15	20	25	38	50	65
a _T min [mm]	7.5	8	8.5	9	9	8.5

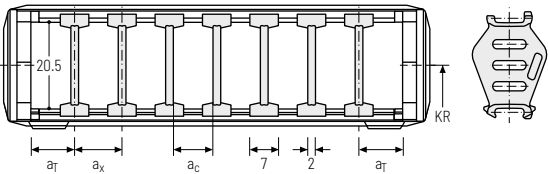

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	3.5	7	5	-	2
B	3.5	8	6	2	2

B _f [mm]	15	20	25	38	50	65
a _T min [mm]	7.5	8	8.5	9	9	8.5

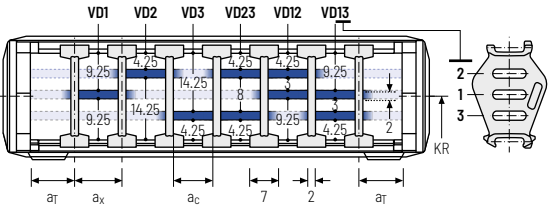

Order example



TS1 . A . 3 - VD0

:

- VD1



Divider system Version η_T Height separation

Please state the designation of the divider system (**TS0, TS1...**), version and number of dividers per cross section [η_T].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.


Universal end connectors UMB – plastic (standard)

The universal end connectors (UMB) are made from plastic and can be mounted from the top, from the bottom, or face on.

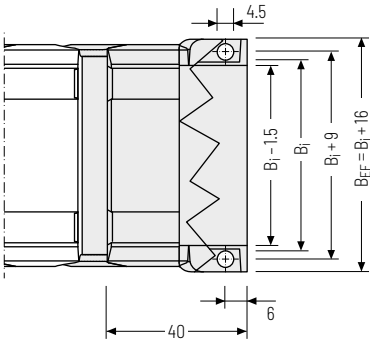


▲ Assembly options

 Recommended tightening torque: 3 Nm for cheese-head screws ISO 4762 - M4 x 12



The end connectors are also available as an option **without** cover sheets. Please state when ordering.



Connection point
F – fixed point
M – driver

Connection type
U – Universal mounting bracket

Order example

	UMB	F	U
UMB	M	U	
End connector	Connection point	Connection type	

 We recommend the use of strain reliefs before driver and fixed point. See from p. 924.

PROTUM® series	K series	UNIFLEX Advanced series	M series	TKHP® series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	--------------	-----------	-----------------	------------	------------	------------

TKA38



Pitch
38.5 mm



Inner height
26 mm



Inner widths
25 – 130 mm



Bending radii
70 – 230 mm

Stay variants



Design 060 page 598

Covered on both sides with inside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.




Design 080 page 599

Covered on both sides with outside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.

Unsupported arrangement

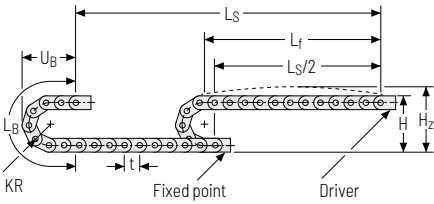


KR [mm]	H [mm]	H _Z [mm]	L _B [mm]	U _B [mm]
70	176	201	297	127
95	226	251	375	152
120	276	301	454	177
145	326	351	532	202
170	376	401	611	227
195	426	451	689	252
230	496	521	799	287

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 1.13 \text{ kg/m}$ at $B_i 78 \text{ mm}$. For other inner widths, the maximum additional load changes.

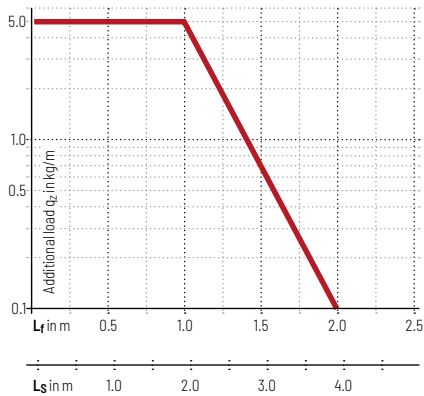

Speed
up to 10 m/s



Acceleration
up to 50 m/s²




Travel length
up to 3.9 m



Additional load
up to 5 kg/m

Gliding arrangement

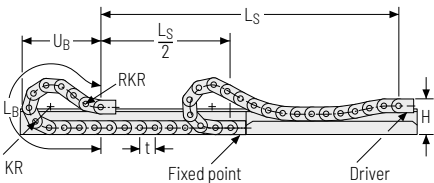

Speed
up to 2.5 m/s



Acceleration
up to 20 m/s²



Travel length
up to 120 m



Additional load
up to 5 kg/m



The gliding cable carrier has to be routed in a channel. See p. 866.

Stay variant 060 – covered on both sides with inside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 25 – 130 mm

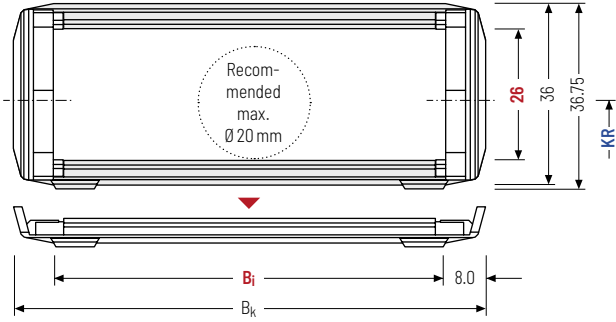

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	h_g' [mm]	B_i [mm]			B_k [mm]	KR [mm]				q_k [kg/m]
26	36	36.75	25	38	58	$B_i + 16$	70	95	120	145	0.77 – 1.47
			78	103	130		170	195	230		

Order example

TKA38
Type

•

060
Stay variant

•

78
 B_i [mm]

•

145
 KR [mm]

•

1155
 L_k [mm]

•

VS
Stay arrangement

Stay variant 080 – covered on both sides with outside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 25 – 130 mm

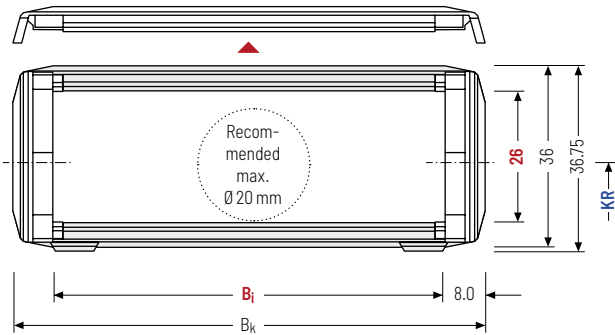

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	h_g' [mm]	B_i [mm]			B_k [mm]	KR [mm]				q_k [kg/m]
26	36	36.75	25	38	58	$B_i + 16$	70	95	120	145	0.77 – 1.47
			78	103	130		170	195	230		

Order example



TKA38 · 080 · 78 · 145 · 1155 · VS

Type Stay variant B_i [mm] KR [mm] L_k [mm] Stay arrangement

Divider systems

As a standard, the divider system is mounted on every 2nd chain link.


As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.

The locking cams click into place in the locking grids in the covers (**version B**).


Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min	
A	3.5	7	5	-	-	
B		8	6	2	-	
B _i [mm]	25	38	58	78	103	130
a _T min [mm]	8.5	9	9	9	7.5	9

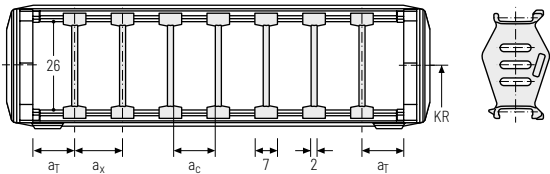

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min	
A	3.5	7	5	-	2	
B		8	6	2	2	
B _i [mm]	25	38	58	78	103	130
a _T min [mm]	8.5	9	9	9	7.5	9

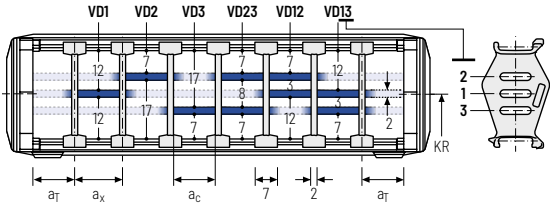

Order example



TS1 . A . 3 - VD0

:

- VD1



Divider system Version η_T Height separation

Please state the designation of the divider system (**TS0, TS1...**), version and number of dividers per cross section [η_T].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

Universal end connectors UMB – plastic (standard)


The universal end connectors (UMB) are made from plastic and can be mounted from the top, from the bottom, or face on.

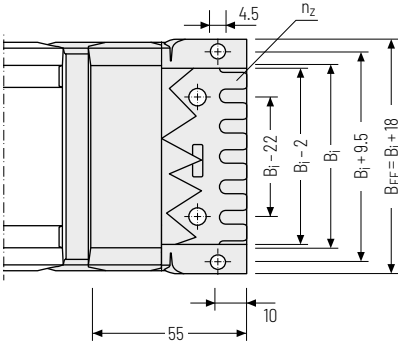


▲ Assembly options

 Recommended tightening torque: 3 Nm for cheese-head screws ISO 4762 - M4 x 20

B_i [mm]	B_{EF} [mm]	n_z
25	43	2
38	56	3
58	76	5
78	96	7
103	121	9
130	148	11



The end connectors are also available as an option **without** cover sheets. Please state when ordering.



Connection point
F – fixed point
M – driver

Connection type
U – Universal mounting bracket

Order example



UMB	.	F	U
UMB	.	M	U
End connector		Connection point	Connection type

PROTUM® series	K series	UNIFLEX Advanced series	M series	TKHP® series	XL series	QUANTUM® series	TKR series	TKA series	UAT series
----------------	----------	-------------------------	----------	--------------	-----------	-----------------	------------	------------	------------

TKA45



Pitch
45.5 mm



Inner height
36 mm



Inner widths
50 – 150 mm



Bending radii
82 – 230 mm

Stay variants



Design 060 page 604

Covered on both sides with inside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.




Design 080 page 605

Covered on both sides with outside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.

Unsupported arrangement

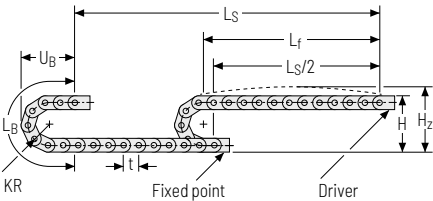


KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
82	214	249	348	153
95	240	275	389	166
125	300	335	483	196
145	340	375	546	216
170	390	425	625	241
200	450	485	719	271
230	520	555	814	301

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 2.29 \text{ kg/m}$ at $B_i 150 \text{ mm}$. For other inner widths, the maximum additional load changes.

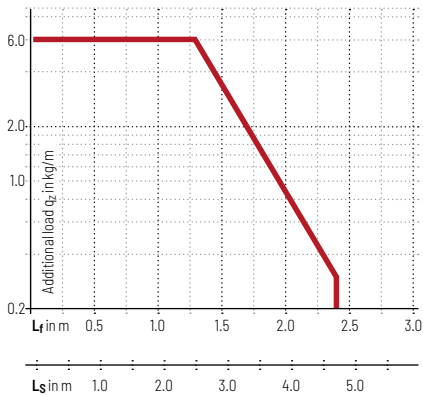

Speed
up to 9 m/s



Acceleration
up to 45 m/s²




Travel length
up to 4.7 m



Additional load
up to 6 kg/m

Gliding arrangement

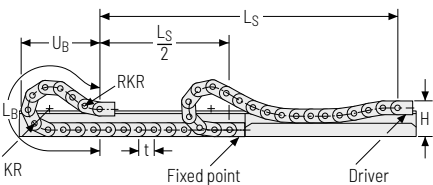

Speed
up to 3 m/s



Acceleration
up to 20 m/s²



Travel length
up to 125 m



Additional load
up to 6 kg/m



The gliding cable carrier has to be routed in a channel. See p. 866.

Stay variant 060 – covered on both sides with inside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 50 – 150 mm

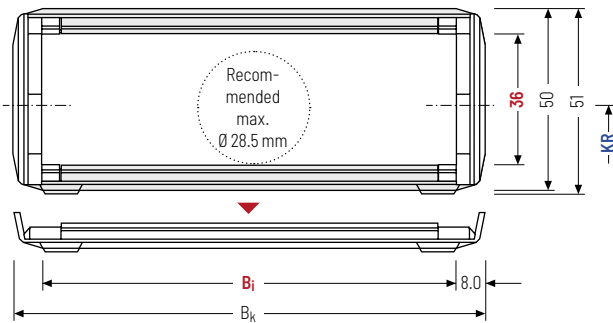

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	h_g' [mm]	B_i [mm]			B_k [mm]	KR [mm]				q_k [kg/m]
36	50	51	50	75	100	$B_i + 16$	82	95	125	145	1.34 – 2.29
			125	150			170	200	230		

Order example



TKA45

Type

060

Stay variant

125

B_i [mm]

170

KR [mm]

1456

L_k [mm]

VS

Stay arrangement

Stay variant 080 – covered on both sides with outside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 50 – 150 mm

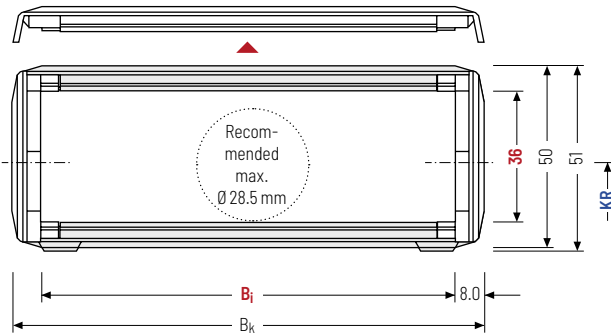

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	$h_{g'}$ [mm]	B_i [mm]			B_k [mm]	KR [mm]				q_k [kg/m]
36	50	51	50	75	100	$B_i + 16$	82	95	125	145	1.34 – 2.29
			125	150			170	200	230		

Order example



TKA45	080	125	170	1456	VS
Type	Stay variant	B_i [mm]	KR [mm]	L_k [mm]	Stay arrangement

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

Divider systems

The divider system is mounted on every 2nd chain link as a standard.


As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.

The locking cams click into place in the locking grids in the covers (**version B**).


Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	4	8	5.5	-	-
B		8	5.5	2	-
B _i [mm]	50	75	100	125	150
a _T min [mm]	11	11.5	12	12.5	11

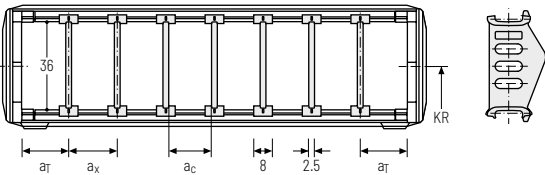

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	4	8	5.5	-	2
B		8	5.5	2	2
B _i [mm]	50	75	100	125	150
a _T min [mm]	11	11.5	12	12.5	11

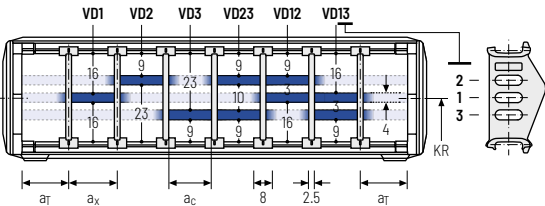

Order example

TS1

A

3

VD0

⋮

VD1

Divider systemVersionη_THeight separation

Please state the designation of the divider system (**TS0, TS1...**), version and number of dividers per cross section [η_T].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

Divider system TS3 with height separation consisting of plastic partitions

As a standard, the divider **A** is used for vertical partitioning within the cable carrier. The complete divider system can be moved within the cross section. (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them. The locking cams click into place in the locking grids in the covers (**version B**).

Divider version A





End divider



Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	n _T min
A	4 / 2*	14	10	2

* For End divider

The dividers are fixed by the partitions. the complete divider system is movable in the cross section.

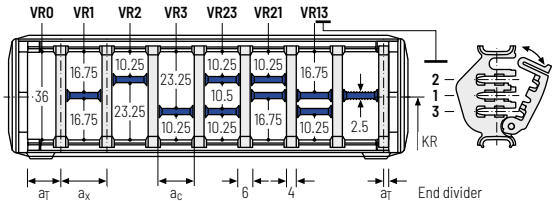

a _x (center distance of dividers) [mm]															
a _c (nominal width of inner chamber) [mm]															
14	16	19	23	24	28	29	32	33	34	38	39	43	44	48	54
10	12	15	19	20	24	25	28	29	30	34	35	39	40	44	50
58	59	64	68	69	74	78	79	80	84	88	89	94	96	99	112
54	55	60	64	65	70	74	75	76	80	84	85	90	92	95	108

When using partitions with **a_x > 49 mm** we recommended an additional preferential central support.

Order example



TS3	.	A	.	3	.	K1	.	34	-	VR1
						:		:		:
						K4	.	38	-	VR3
Divider system		Version		n _T		Chamber		a _x		Height separation

Please state the designation of the divider system (**TS0, TS1...**). version and number of dividers per cross section [**n_T**]. In addition, please also enter the chambers [**K**] from left to right, as well as the assembly distances [**a_T/a_x**] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. **VD23**] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series



TKA
series

UAT
series

PROTUM®
seriesK
seriesUNIFLEX
Advanced
seriesM
seriesTKHP®
seriesXL
seriesQUANTUM®
seriesTKR
series**TKA
series**UAT
series

Universal end connectors UMB – plastic (standard)


The universal end connectors (UMB) are made from plastic and can be mounted from the top, from the bottom, or face on.

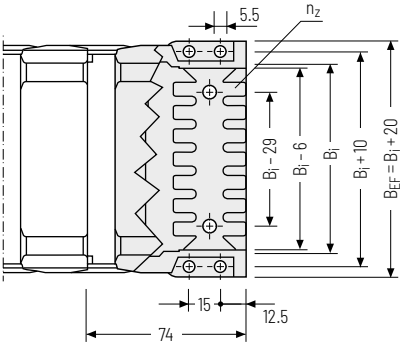


▲ Assembly options

 Recommended tightening torque: 5 Nm for cheese-head screws ISO 4762 - M5 x 8.8

B_i [mm]	B_{eff} [mm]	n_z
50	70	2 x 3
75	95	2 x 5
100	120	2 x 7
125	145	2 x 9
150	170	2 x 11



The end connectors are also available as an option **without** cover sheets. Please state when ordering.



Connection point
F – fixed point
M – driver

Connection type
U – Universal mounting bracket

Order example

	UMB	.	F	U
	UMB	.	M	U
	End connector		Connection point	Connection type

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

TKA55



Pitch
55.5 mm



Inner height
45 mm



Inner widths
50 – 250 mm



Bending radii
100 – 300 mm

Stay variants



Design 060 page 612

Covered on both sides with inside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.




Design 080 page 613

Covered on both sides with outside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.

Unsupported arrangement

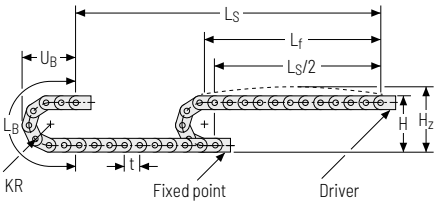


KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
100	264	304	425	188
120	304	344	488	208
140	344	384	551	228
170	404	454	645	258
195	454	494	725	283
225	514	554	818	313
250	564	604	896	338
300	664	704	1211	388

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 1.95 \text{ kg/m}$ at $B_i 50 \text{ mm}$. For other inner widths, the maximum additional load changes.

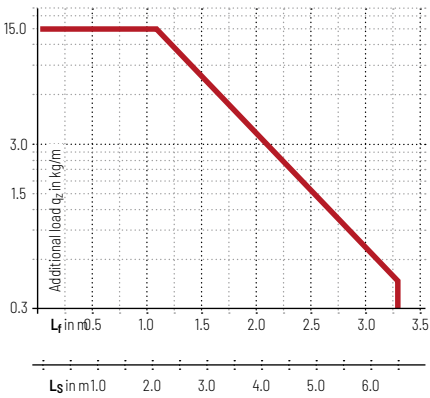


**Speed**
up to 8 m/s

**Acceleration**
up to 40 m/s²

**Travel length**
up to 6.5 m

**Additional load**
up to 15 kg/m

Gliding arrangement

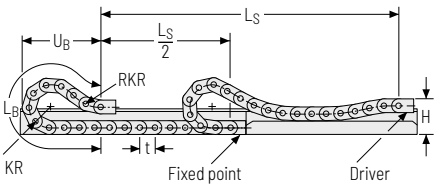

**Speed**
up to 3 m/s

**Acceleration**
up to 15 m/s²

**Travel length**
up to 150 m

**Additional load**
up to 15 kg/m

 The gliding cable carrier has to be routed in a channel. See p. 866.

Stay variant 060 – covered on both sides with inside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 50 – 250 mm

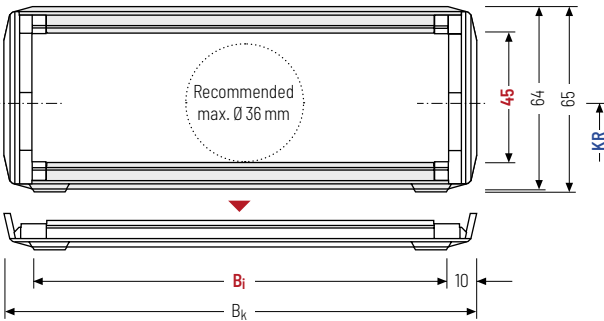

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	h_g' [mm]	B_i [mm]					B_k [mm]	KR [mm]				q_k [kg/m]
45	64	65	50	75	100	125	150	$B_i + 20$	100	120	140	170	1.95
			175	200	225	250			195	225	250	300	4.28

Order example



TKA55

Type

060

Stay variant

200

B_i [mm]

225

KR [mm]

2553

L_k [mm]

VS

Stay arrangement

Stay variant 080 – covered on both sides with outside detachable cover


- » Plastic cover for rough environmental conditions with dirt, chips or spray water.
- » Fully detachable on one side in any position.
- » **Outside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 50 - 250 mm

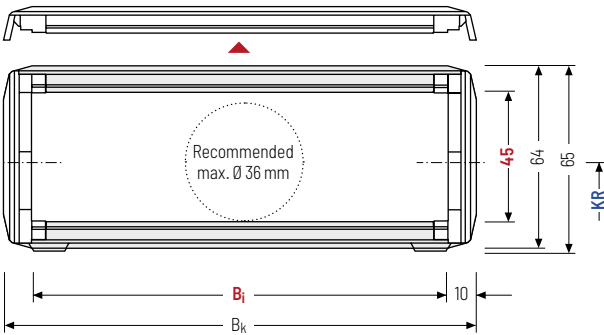

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h _i [mm]	h _g [mm]	h _{g'} [mm]	B _i [mm]					B _k [mm]	KR [mm]				q _k [kg/m]
45	64	65	50	75	100	125	150	B _i + 20	100	120	140	170	1.95
			175	200	225	250			195	225	250	300	4.28

Order example

TKA55

080

200

225

2553

VS

Type

Stay variant

B_i [mm]

KR [mm]

L_k [mm]

Stay arrangement

PROTUM® series
K series
UNIFLEX Advanced series
M series
TKHP® series
XL series
QUANTUM® series
TKR series
TKA series
UAT series

Divider systems

As a standard, the divider system is mounted on every 2nd chain link.

As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.


The locking cams click into place in the locking grids in the covers (**version B**).

Divider system TSO without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	5	10	7	-	-
B		10	7	2	-

B _i [mm]	50	75	100	125	150
a _T min [mm]	13	11.5	12	12.5	13

B _i [mm]	175	200	225	250	
a _T min [mm]	11.5	12	12.5	13	

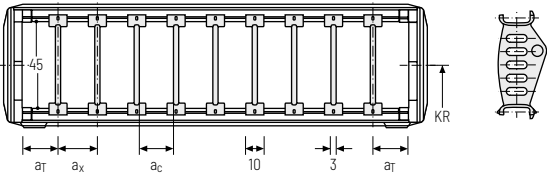


Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x grid [mm]	η _T min
A	5	10	7	-	2
B		10	7	2	2

B _i [mm]	50	75	100	125	150
a _T min [mm]	13	11.5	12	12.5	13

B _i [mm]	175	200	225	250	
a _T min [mm]	11.5	12	12.5	13	

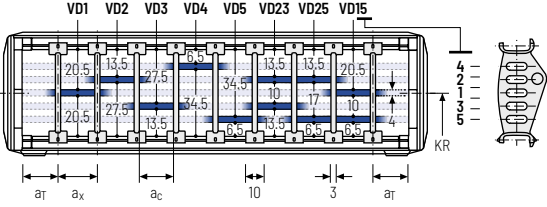

Order example



TS1

A

3

VD0

⋮

VD1

Divider systemVersionηTHeight separation

Please state the designation of the divider system (**TS0, TS1...**), version and number of dividers per cross section [η_T].

If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

Divider system TS3 with height separation consisting of plastic partitions

As a standard, the divider **A** is used for vertical partitioning within the cable carrier. The complete divider system can be moved within the cross section. (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them. The locking cams click into place in the locking grids in the covers (**version B**).

Divider version A





End divider



Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	n _T min
A	4 / 2*	14	10	2

* For End divider

The dividers are fixed by the partitions. the complete divider system is movable in the cross section.

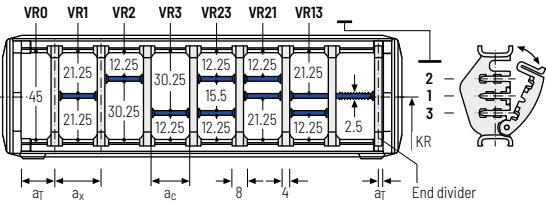

a _x (center distance of dividers) [mm]															
a _c (nominal width of inner chamber) [mm]															
14	16	19	23	24	28	29	32	33	34	38	39	43	44	48	54
10	12	15	19	20	24	25	28	29	30	34	35	39	40	44	50
58	59	64	68	69	74	78	79	80	84	88	89	94	96	99	112
54	55	60	64	65	70	74	75	76	80	84	85	90	92	95	108

When using partitions with a_x > 49 mm we recommended an additional preferential central support.

Order example



TS3	A	3	K1	34	VR1
			⋮	⋮	⋮
			K4	38	VR3
Divider system	Version	n _T	Chamber	a _x	Height separation

Please state the designation of the divider system (**TS0, TS1...**). version and number of dividers per cross section [n_T]. In addition, please also enter the chambers [K] from left to right, as well as the assembly distances [a_T/a_x] (as seen from the driver).

If using divider systems with height separation (**TS1, TS3**) please also state the positions [e.g. VD23] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series



TKA
series

UAT
series



Universal end connectors UMB – plastic (standard)


The universal end connectors (UMB) are made from plastic and can **be mounted from the top, from the bottom, or face on.**

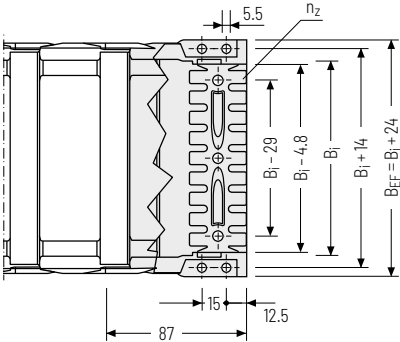


▲ Assembly options

 Recommended tightening torque: 5 Nm for cheese-head screws ISO 4762 - M5 x 8.8

B_i [mm]	B_{EF} [mm]	n_z
50	74	2 x 3
75	99	2 x 5
100	124	2 x 7
125	149	2 x 9
150	174	2 x 11
175	199	2 x 13
200	224	-
225	249	-
250	274	-



The end connectors are also available as an option **without** cover sheets. Please state when ordering.



Connection point
F – fixed point
M – driver

Connection type
U – Universal mounting bracket

Order example



UMB	.	F	U
UMB	.	M	U
End connector		Connection point	Connection type

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series