

TRAXLINE pre-assembled OEM high flex cables

You need connection-ready harnessed **bus cables**?
Or harnessed **signal- or power cables** for drives –
in accordance to OEM specifications?

Simply order by quoting just the **OEM order number and cable length**, and wait for your original **TRAXLINE** quality goods to arrive.

Connection-ready harnessed cables

- easy to order with just order number and cable length
- in accordance to OEM specifications
- Just-in-time delivery of three work days
- **no minimum order quantities**
- **individual cable lengths without surcharge**
- checked and monitored for reliable connection

Properties of the **TRAXLINE** cables:



TRAXLINE USB 700 C pre-assembled

Shielded continuous bending hi-flex USB PUR cable

Properties of the TRAXLINE cables:

- UV-resistant
 - CFC-free
 - Minimum bend radius 10 x Ø
 - halogen-free
 - flame-retardant
- Approvals: cURus, based on VDE, REACH/RoHS II



Picture obtainable.

| cable type | approx. diameter mm | minimum bend radius moved KR _{min} |
|------------------------|---------------------|---|
| USB S 700 C – type A/B | 5.2 | 10 x Ø |
| USB L 700 C – type A/B | 6.6 | 10 x Ø |
| USB 3.0 CD – type A/B | 6.8 | 10 x Ø |

Smaller bend radii are possible in many cases – contact us about options.

More information:
traxline.com

kabelschlepp.de

TRAXLINE CAT.5E / CAT.6 700 CD pre-assembled

Shielded continuous bending hi-flex CAT.5E / CAT.6 PUR cable

Properties of the TRAXLINE cables:

- UV-stable
 - CFC-free
 - Minimum bend radius 7.5 x Ø
 - halogen-free
 - flame-retardant
- Approvals: cURus, based on VDE, REACH/RoHS II



Picture obtainable.

| cable type | approx. diameter mm | minimum bend radius moved KR _{min} |
|------------------------------|---------------------|---|
| CAT.5E 8-stranded straight | 7.1 | 10 x Ø |
| CAT.5E 8-stranded cross-over | 7.1 | 10 x Ø |
| CAT.6 8-stranded straight | 8.0 | 10 x Ø |
| CAT.6 8-stranded cross-over | 8.0 | 10 x Ø |

Smaller bend radii are possible in many cases – contact us about options.

Additional cable types upon request.

Sales terms and delivery conditions under kabelschlepp.de

Subject to change.

Questions about cable carrier cables? Fon: +49 2762 4003-0

TRAXLINE pre-assembled PUR signal cables

Cables with connections compatible with the OEM standards

Properties of the TRAXLINE cables:

- UV-resistant
 - CFC-free
 - Minimum bend radius 7.5 x Ø
 - halogen-free
 - flame-retardant
- Approvals: cURus, based on VDE, REACH/RoHS II



Signal basic cables

PUR design



| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR _{min} |
|--------------------------------|---------------------|---|
| 6FX8002 2AD00 | 9.5 | 7.5 x Ø |
| 6FX8002 2CA31 | 10.1 | 7.5 x Ø |
| 6FX8002 2CA51 | 9.5 | 7.5 x Ø |
| 6FX8002 2CA61 | 9.5 | 7.5 x Ø |
| 6FX8002 2CF02 | 9.5 | 7.5 x Ø |
| 6FX8002 2CH00 | 9.5 | 7.5 x Ø |
| 6FX8002 2EQ00 | 10.1 | 7.5 x Ø |
| 6FX8002 2EQ10 | 10.1 | 7.5 x Ø |

Varying parameters possible – contact us about options.

Signal extension cables

PUR design



| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR _{min} |
|--------------------------------|---------------------|---|
| 6FX8002 2AD04 | 9.5 | 7.5 x Ø |
| 6FX8002 2CA34 | 10.1 | 7.5 x Ø |
| 6FX8002 2CA54 | 9.5 | 7.5 x Ø |
| 6FX8002 2CB54 | 9.3 | 7.5 x Ø |
| 6FX8002 2CF04 | 9.5 | 7.5 x Ø |
| 6FX8002 2EQ14 | 10.1 | 7.5 x Ø |

Varying parameters possible – contact us about options.

TRAXLINE pre-assembled **PUR** power cables

Cables with connections compatible with the OEM standards

Properties of the TRAXLINE cables:

- UV-resistant
 - CFC-free
 - Minimum bend radius $7.5 \times \varnothing$
 - halogen-free
 - flame-retardant
- Approvals: cURus, based on VDE, REACH/RoHS II



Power basic cables without brake wires

PUR design




| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR_{min} |
|--------------------------------|---------------------|--------------------------------------|
| 6FX8002 5CA01 | 10.4 | $7.5 \times \varnothing$ |
| 6FX8002 5CA11 | 11.7 | $7.5 \times \varnothing$ |
| 6FX8002 5CA21 | 10.4 | $7.5 \times \varnothing$ |
| 6FX8002 5CA31 | 11.7 | $7.5 \times \varnothing$ |
| 6FX8002 5CA41 | 13.5 | $7.5 \times \varnothing$ |
| 6FX8002 5CA51 | 16.3 | $7.5 \times \varnothing$ |
| 6FX8002 5CA61 | 19.7 | $7.5 \times \varnothing$ |

Varying parameters possible – contact us about options.

Power extension cables without brake wires

PUR design

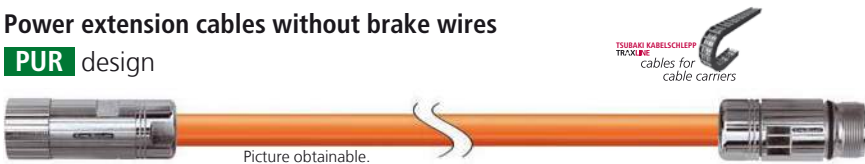

| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR_{min} |
|--------------------------------|---------------------|--------------------------------------|
| 6FX8002 5CA05 | 10.4 | $7.5 \times \varnothing$ |
| 6FX8002 5CA15 | 11.7 | $7.5 \times \varnothing$ |
| 6FX8002 5CA28 | 10.4 | $7.5 \times \varnothing$ |
| 6FX8002 5CA38 | 11.7 | $7.5 \times \varnothing$ |
| 6FX8002 5CA48 | 13.5 | $7.5 \times \varnothing$ |
| 6FX8002 5CA58 | 16.3 | $7.5 \times \varnothing$ |
| 6FX8002 5CA68 | 19.7 | $7.5 \times \varnothing$ |

Varying parameters possible – contact us about options.

Additional cable types upon request.

Sales terms and delivery conditions under kabelschlepp.de

More information:
traxline.com

kabelschlepp.de

Questions about cable carrier cables? Fon: +49 2762 4003-0

TRAXLINE pre-assembled PUR power cables

Cables with connections compatible with the OEM standards


Properties of the TRAXLINE cables:

- UV-resistant
 - CFC-free
 - Minimum bend radius 7.5 x Ø
 - halogen-free
 - flame-retardant
- Approvals: cURus, based on VDE, REACH/RoHS II



Power basic cables with brake wires

PUR design

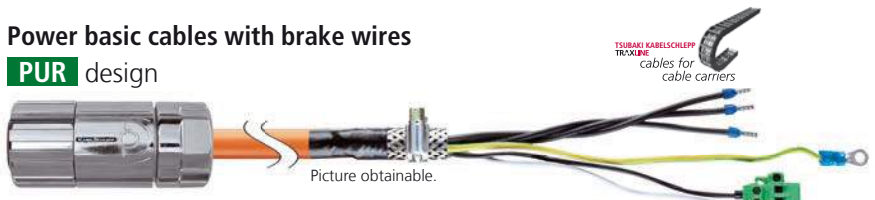


Picture obtainable.

| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR _{min} |
|--------------------------------|---------------------|---|
| 6FX8002 5DA01 | 12.6 | 7.5 x Ø |
| 6FX8002 5DA11 | 14.0 | 7.5 x Ø |
| 6FX8002 5DA21 | 12.6 | 7.5 x Ø |
| 6FX8002 5DA31 | 14.0 | 7.5 x Ø |

Varying parameters possible – contact us about options.

Power extension cables with brake wires

PUR design

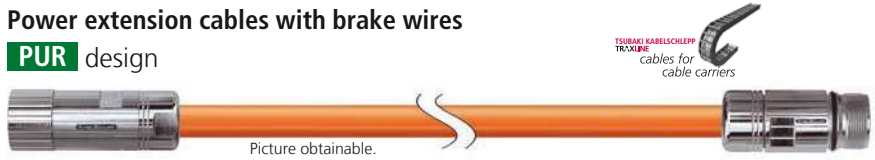

Picture obtainable.

| KS alternative to OEM standard | approx. diameter mm | minimum bend radius moved KR _{min} |
|--------------------------------|---------------------|---|
| 6FX8002 5DA05 | 12.6 | 7.5 x Ø |
| 6FX8002 5DA15 | 14.0 | 7.5 x Ø |
| 6FX8002 5DA28 | 12.6 | 7.5 x Ø |
| 6FX8002 5DA38 | 14.0 | 7.5 x Ø |


Varying parameters possible – contact us about options.

Extension cables

In addition to connection-ready harnessed basic cables, **extension cables** are also available.

These are available as **signal** and **power cables** for drives – according to OEM specifications.

Simply order by quoting just the **order number** and **cable length**, and wait for your original TRAXLINE quality goods to arrive.

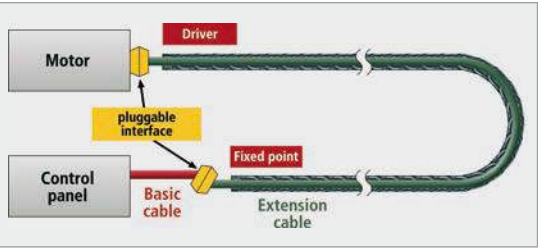

More information:
traxline.com

kabelschlepp.de

Questions about cable carrier cables? Fon: +49 2762 4003-0