


UAT series

Extreme cable protection in harsh
environmental conditions

Trademarks are legally protected for the TSUBAKI KABELSCHLEPP GmbH
as a national or international registration in the following countries:
tsubaki-kabelschlepp.com/trademarks

Subject to change without notice.

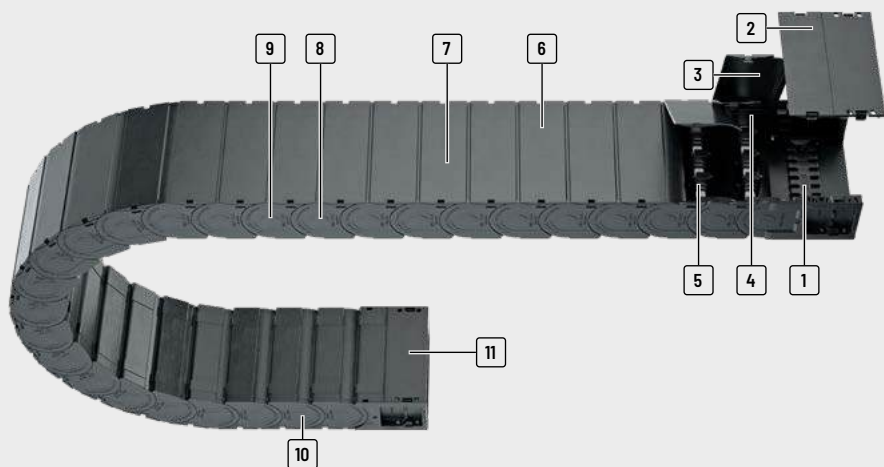

- | | | | |
|---|---|--|--|
| 1 Connectors with optional strain relief | 4 Gentle on the cables – interior space without projecting edges | 7 Secure hold of the covers also under heavy load (e.g. by the use of hydraulic cables) | 10 Very quiet thanks to integrated noise damping system |
| 2 Completely detachable covers | 5 Dividers and height separations for cable separation | 8 Chain links made of plastic | 11 Cover system also in the connection |
| 3 Easy and quick to open | 6 Designs with outward opening covers | 9 Extensive unsupported length | |

Features

- » outstanding protection for the cables
- » quick cable laying – outside opening designs
- » very quiet thanks to internal noise damping system
- » large unsupported length
- » high-quality visual design
- » for unsupported and gliding arrangements
- » sliding surfaces with wear volume integrated in the inner cover



Simply unlock cover with a screwdriver



Detach the cover from the chain link



Divider system TS1



Optional strain relief comb – also placed on top of one another

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

PROTUN® series
K series
UNIFLEX Advanced series
M series
TKHP® series
XL series
QUANTUM® series
TKR series
TKA series
UAT series

Type	Opening variant	Stay variant	h_i [mm]	h_G [mm]	B_i [mm]	B_k [mm]	B_i - grid [mm]	t [mm]	KR [mm]	Additional load ≤ [kg/m]	Cable- d _{max} [mm]
UAT1555											
080											
50											
69											
75 - 175											
Bi+21											
-											
55.5											
100 - 300											
15											
40											

Unsupported arrangement			Gliding arrangement			Inner Distribution				Movement			Page
Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s ²]	Travel length ≤ [m]	v_{max} ≤ [m/s]	a_{max} ≤ [m/s ²]	TS0	TS1	TS2	TS3	vertical hanging or standing	lying on the side	rotating arrangement	

6.5	8	40	150	3	15	•	•	-	-	•	•	-	622

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

UAT1555



Pitch
55.5 mm



Inner height
50 mm



Inner widths
75 – 175 mm



Bending radii
100 – 300 mm

Stay variants




Design 080 page 624

Covered on both sides with outside detachable cover

- » Plastic cover for rough environmental conditions with dirt, chips and dust.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.

Unsupported arrangement

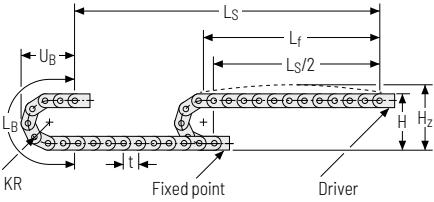


KR [mm]	H [mm]	H _z [mm]	L _B [mm]	U _B [mm]
100	268	298	425	190
125	318	348	504	215
150	368	398	582	240
175	418	448	661	265
200	468	498	739	290
225	518	548	818	315
250	568	598	896	340
300	668	698	1053	390

Load diagram for unsupported length depending on the additional load.

Sagging of the cable carrier is technically permitted for extended travel lengths, depending on the specific application.

Intrinsic cable carrier weight $q_k = 2.9 \text{ kg/m}$ at B_i 125 mm. For other inner widths, the maximum additional load changes.

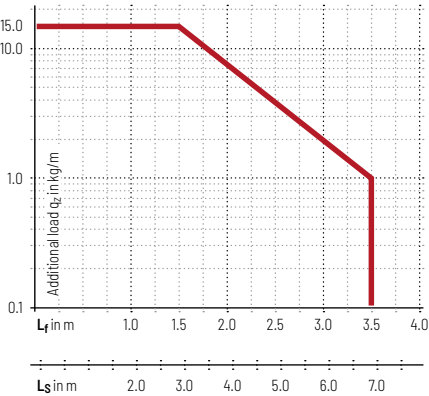

Speed
up to 8 m/s



Acceleration
up to 40 m/s²




Travel length
up to 6.5 m



Additional load
up to 15 kg/m

Gliding arrangement

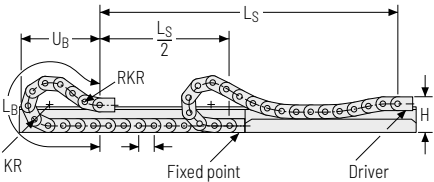

Speed
up to 3 m/s



Acceleration
up to 15 m/s²



Travel length
up to 150 m



Additional load
up to 15 kg/m



The gliding cable carrier has to be routed in a channel. See p. 866.

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series

Stay variant 080 – covered on both sides with inside detachable cover


- » Plastic cover for rough environmental conditions with dirt and chips.
- » Fully detachable on one side in any position.
- » **Inside:** very quick release.



Stay arrangement on each chain link (**VS: fully-stayed**)



B_i 75 – 175 mm

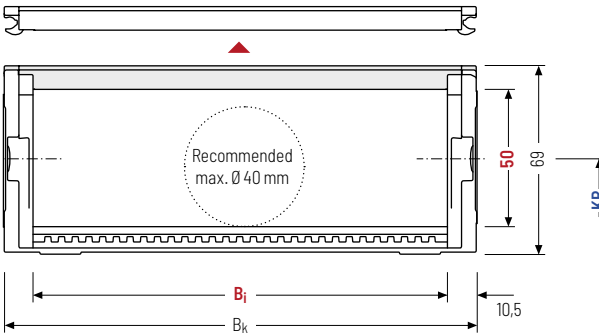

The maximum cable diameter strongly depends on the bending radius and the desired cable type. Please contact us.

Calculating the cable carrier length

Cable carrier length L_k

$$L_k \approx \frac{L_S}{2} + L_B$$

Cable carrier length L_k rounded to pitch t

h_i [mm]	h_g [mm]	B_i [mm]	B_k [mm]	KR [mm]	q_k [kg/m]
50	69	75 125 175	$B_i + 21$	100 125 150 175	2,43
				200 225 250 300	3,44

Order example



UAT1555

Type

080

Stay variant

175

B_i [mm]

225

KR [mm]

2553

L_k [mm]

VS

Stay arrangement

Divider systems

As a standard, the divider system is mounted on every 2nd chain link.


As a standard, dividers or the complete divider system (dividers with height separations) are movable in the cross section (**version A**).

The dividers are easily attached to the stay for applications with transverse accelerations and for applications laying on the side by simply turning them.

The locking cams click into place in the locking grids in the covers (**version B**).


Divider system TS0 without height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x Grid [mm]	n _T min
A	5	10	7	-	-
B	7.5	10	7	5	-

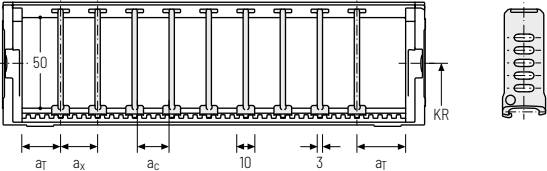

Divider system TS1 with continuous height separation

Vers.	a _T min [mm]	a _x min [mm]	a _c min [mm]	a _x Grid [mm]	n _T min
A	5	10	7	-	2
B	7.5	10	7	5	2

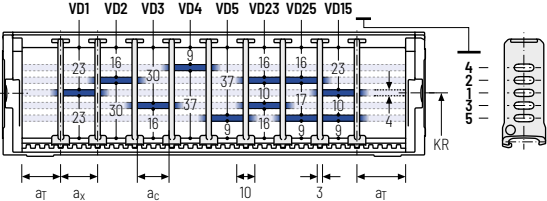

Order example



TS1

A

3

VD0

⋮

VD1

Divider system

Version

n_T

Height separation

Please state the designation of the divider system (**TS0, TS1...**), version and number of dividers per cross section [n_T].
 If using divider systems with height separation (**TS1**) please also state the positions [e.g. VD1] viewed from the left driver belt. You are welcome to add a sketch to your order.

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series


UAT
series





Universal end connectors UMB – plastic (standard)

The universal end connectors (UMB) are made from plastic and can be mounted from the top, from the bottom, or face on.

Driver




Fixed point

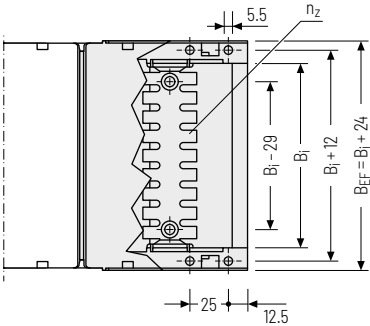

▲ Assembly options

B ₁ [mm]	B _{EF} [mm]	n ₂
75	99	2 x 5
125	149	2 x 9
175	199	2 x 13

 Recommended tightening torque:
5 Nm for cheese-head screws ISO 4762 - M5 x 8.8



Connection point

F – fixed point
M – driver

Connection type

U – Universal mounting bracket

Order example



UMB	F	U
UMB	M	U
End connector	Connection point	Connection type

PROTUM®
series

K
series

UNIFLEX
Advanced
series

M
series

TKHP®
series

XL
series

QUANTUM®
series

TKR
series

TKA
series

UAT
series